



6527—68

Screwed ends with  
pipe cylindrical thread  
Dimensions

6527—68

01.01.69

01.01.96



1.

25' / 2;  
—

16 / 2

2

1.

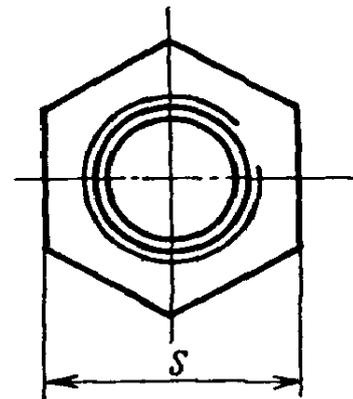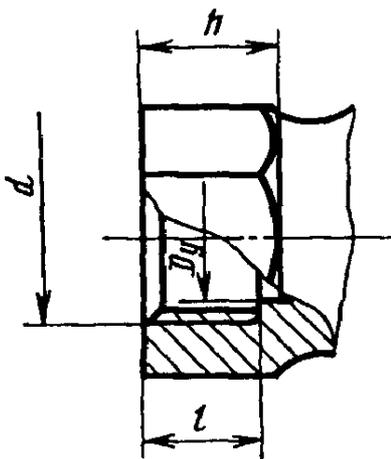

3												
>	<i>d</i>										<i>Jh</i>	
X		5			5			5				
* <sub>*</sub> >									<16	<25	<1&	<23
6	<i>G'U</i>	19	9	10	—	—	—	19	9		7	
10	<i>G<sup>3</sup>/s</i>	22	10	12	27	12	14	22	10	12	8	12
15	<i>G'U</i>	27*	12	14	30	14	16	27	12	15	9	13
20	<i>G4«</i>	36	14	16	36	16	18	32	14	i7	10	14
25	<i>G1</i>	41	16	18	46	18	21	41	16	19	12	16
32	<i>GI —<sub>4</sub></i>	50	<i>ib</i>	21	55	20	23	50	18	22	14	18
40	<i>oi-L<sub>2</sub></i>	60	20	23	60	22	26	60	20	—	16	—
50	<i>G2</i>	70	22	25	75	24	28	70	22	—	18	—
65	<i>G<sub>2j</sub></i>	90	25	28	90	26	30	90	25	—	20	—
80	<i>G 3</i>	100	28	31	105	30	34	100	28	—	22	—

\* 30

.

( , . 2, 3).

3. ( , . 3).

4. — 356—80.

5. , —

6357—81.

( , . 2).

6. ( ) — 10549—80. \*

7\* , —

6424—73. ( » . 1). « » -

8. , ' -

. 2.

2

« » S	
19 30	—1,3
32 50	-2,0
55 60	—2,4
70 105	-2,8

( , . 1).

- 1. -
- . . . ( ) , . . -
- 2. -
- 3. 1994 ., — 10
- 4. 6527—53
- 5. - -

356—80 6357—81 6424—73 10549—80	4 5 7 6
6. ( 1993 .) 1, 2, 3, - ( 5—74, 4—85, 4—89) 1974 ., 1985 ., 1989 .	
7. 1984 . 30.01.85 213 01.01.96	

20 01 93 15 03 93 0,375 0,375  
 0,21 1112  
 « » , 107076, , 6 ' 56 ., 14